

# VDL48 DC Voltage USB Datalogger

## Built in multifunction 2000 count LCD display

### Features:

- Record up to 31,320 DC Voltage readings
- User adjustable sampling rate from 1 second to 24 hours
- High/Low Alarms with visual alert when settings are exceeded
- Built-in multifunction 2000 count LCD display
- 2 LEDs indicate status of record and alarm
- USB interface for transferring recorded data in PDF format to your PC
- Includes 3.6V Lithium battery, test leads with alligator clips, protective cap, and software
- 2-year warranty

### Applications:


Monitor up to 48V single channel DC voltage for long periods of time commonly found in telecom, data centers, automobiles, LED lighting, industrial equipment and power tools, and other low voltage applications

Eliminate manual recording of data



### Specifications

|                  |                                    |
|------------------|------------------------------------|
| Channels         | Single, DC Voltage                 |
| DC Voltage Range | 0 to 48.00V                        |
| Accuracy         | ±0.5%                              |
| Resolution       | 0.01V                              |
| Datalogger       | 31,320 points                      |
| Sample Rate      | Selectable 1 second to 24 hours    |
| PC Interface     | USB port                           |
| Power            | 3.6V Lithium Battery (37-66)       |
| Dimensions       | 4.2 x 0.9 x 0.9" (107 x 24 x 24mm) |
| Weight           | 2oz (55g)                          |

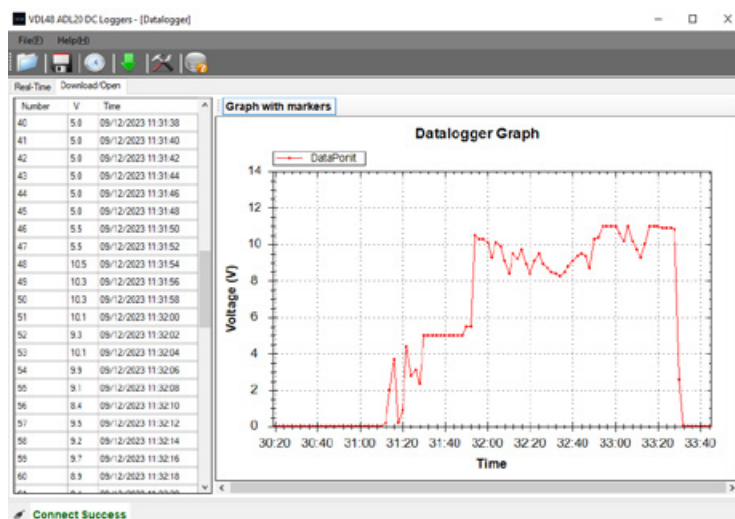

### Ordering Information:

VDL48 DC Voltage PDF Datalogger 3.6V

37-66 Lithium Battery - 2-pack

